



Full size Screen-operated parcel locker with wide possibilities to use. Most advanced solution on the market
Perfect for logistics, e-com and physical retail

KEY FEATURES & ADVANTAGES

Scalability

Easy to add columns from both sides including Loko FRESH

Flexible API

Vendor-independent solution for using various hardware components in APM

Highly secure

Corresponds to RC3 class of burglar resistance

Illumination of columns

Automatically turns on during a night time

Fast installation and maintenance

Patented automotive design

Seamless customization

Can be adapted to different segments of the market


Modern design

Minimal gaps between the doors


Durability

Up to 12 years of lifetime

TYPES OF ECOLOGIS

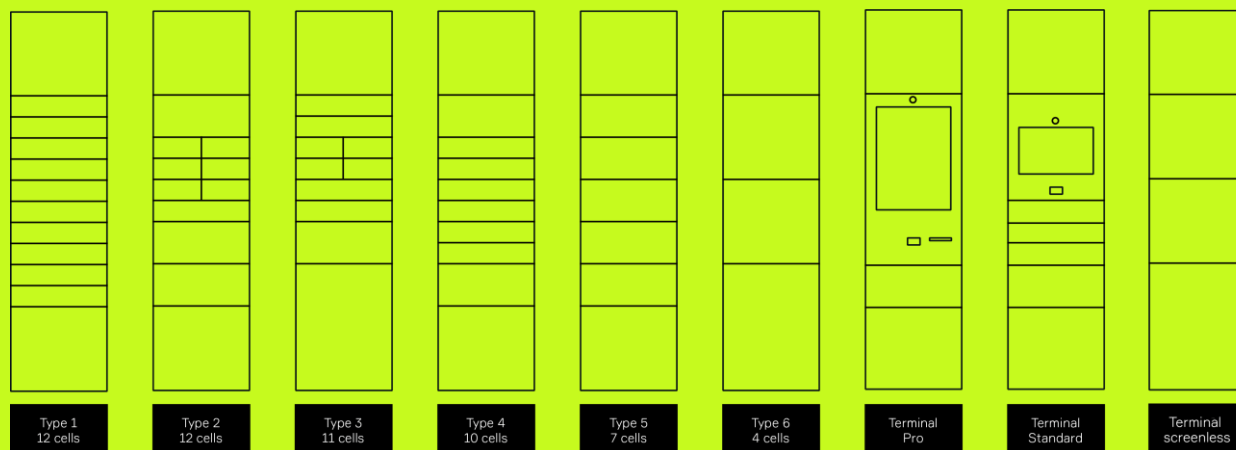

DIMENSIONS

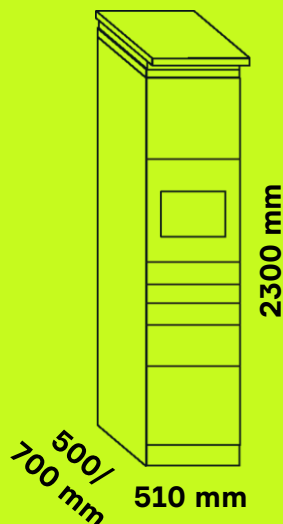

Inner dimensions of compartments

Type of the compartments	Height	Width	Depth
XS	100 mm	185 mm	475/670 mm
S	100 mm	440 mm	475/670 mm
M	210 mm	440 mm	475/670 mm
L	430 mm	440 mm	475/670 mm
XL	650 mm	440 mm	475/670 mm

TECHNICAL DATA

Configuration Min	Terminal column 1 unit + postal column 1 unit
Configuration Max	Terminal column 1 unit + postal column 40 units
Dimensions	
Total height of Loko LOGIS (with base and roof), mm	2300
Terminal/postal column (HxWxD), mm	2042x510x500/700
Height to the top shelf, mm	1730
Weight	
Terminal column/Postal column, kg	105/70
Compartments	
(HxWxD), mm	XS: 100x185x475/670 S: 100x440x475/670 M: 210x440x475/670 L: 430x440x475/670 XL: 650x440x475/670
Max. load, kg	32
Terminal compartment specification	
Patented automotive design - Monoblock	Industrial PC - Intel Core i5-4200U, 8GB, 5.5mm 12V In 2D Scanner Newland NLS FM430 Monitor AUO 15.6" Color Touch Open Frame GF15FTN03.0, 1920 x 1080 60Hz Face Camera Wi-Fi Router Teltonika/ RUT955, 4G/LTE (Cat 4), 3G, 2G, Dual SIM
IP protection class	
Terminal compartment/Postal compartment	IP 54/IP 33
Burglar resistance class	RC3, According to EN 1627
Connectivity	
Power supply	230V AC, 50 Hz
Communication	Ethernet cable Wi-Fi router for 2 Sim Cards
Operational temperature	-25 °C to +45 °C // 5 to 90 % RH
Software	Open API/Convenient dashboard/Locker interface/Courier's app/Client's app/Service app/SAAS/On premise/Support

GET DETAILS
HERE

